

Reserving hopper TK3

For emptying the trailer

Technical specifications

- Very robust painted welded frame
- Mounted on 4 self-aligning bearings
- Three-phase gear motor with variable speed (0.55 Kw)
- PVC belt width 500 mm
- Hopper 2.50 m galvanized folded bolted

Operation

- Hopper with inclined belt of 3 m
- By PVC conveyor belt, width 500 mm
- Adjustment of the belt tension
- Adjustment of the belt speed by mechanical variator
- The 2.50 m wide hopper allows the emptying of a trailer
- Possibility of an extension of 1 m to feed a screen




Weight and dimensions

- Length: 4.42 m – 5.34 m (version with extension)
- Width: 0.70 m (0.85 m with the engine)
- Height: 1.65 m – 2.05 m (version with extension)

Suitable crops



Version standard

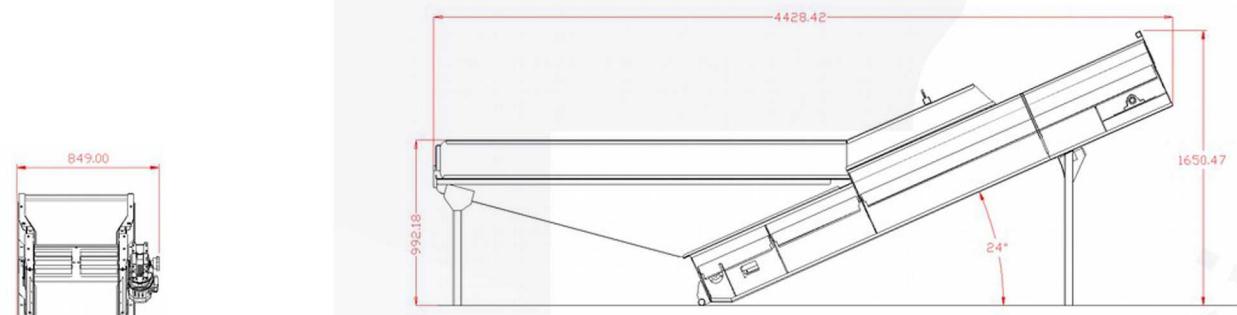

Version with extension 1 m

